

STEPVAN/WAREHOUSE PRINTER STAND ASSEMBLY INSTRUCTION

GEK-05017

Introduction

This instruction covers the procedure for installing the paper guide onto the step van/warehouse printer stand and mounting the printer to the stand.

Preparing the printer stand for assembly

1. Place the printer stand on a suitable work surface (i.e. workbench, desk, etc).
2. Position the printer stand with the paper insertion opening toward front of the work surface.
3. Remove the paper guide wrapped in bubble wrap from within the paper box.
4. Unwrap the paper guide.


Installation of the paper guide

1. Remove the two (2) hex head screws/flat washers located on the top plate above the paper insertion opening.



2. Slide the paper guide between the top plate and the paper box and align the slots in the paper guide with the threaded inserts in the paper box.
3. Thread the hex head screws/flat washers partially into the inserts in the paper box.

4. From left to right, center the slots in the paper guide with the hex head screw/flat washers.

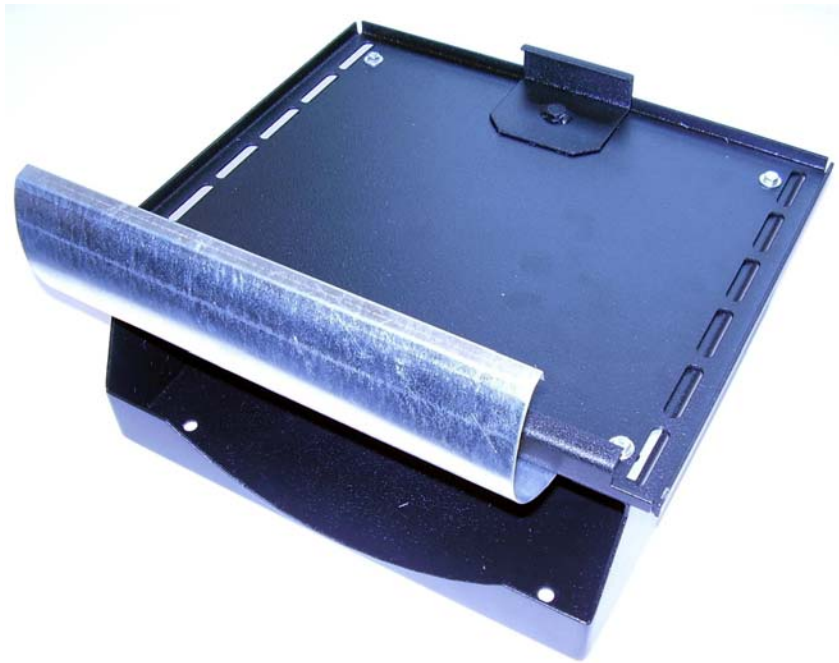

5. Tighten the hex head screws/flat washers to 28-30 in-lb (3.1-3.4 N-m) to secure the paper guide.

Mounting of the printer to the stand

1. Loosen the 5/16" hex nut that holds the mounting clamp with a 1/2" wrench and slide clamp towards the rear of the stand.
2. With the printer's paper tractor facing the front of the stand, insert the top plate hooks into the slots of the printer adapter plate.
3. Insert clamp into slot of the printer adapter plate and tighten the hex nut to 10-12 ft-lb (13.6-16.3 N-m).
4. Hook the formed edge of the paper guide over the edge of the printer.